

TECHNICAL CHARACTERISTICS

SALOETB

Alo




Outdoor Chair

The new Alo Outdoor, with its well known steel structure and its seat in steel ribbons that seem as if they were floating, giving the chair a sense of lightness and elegance. Available in all our epoxy colours.

DESIGNED BY GABRIEL TEIXIDÓ



ondarreta

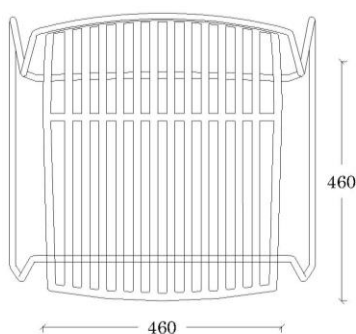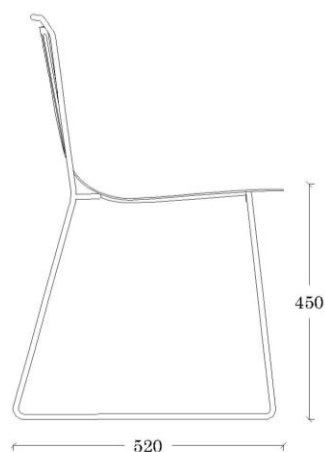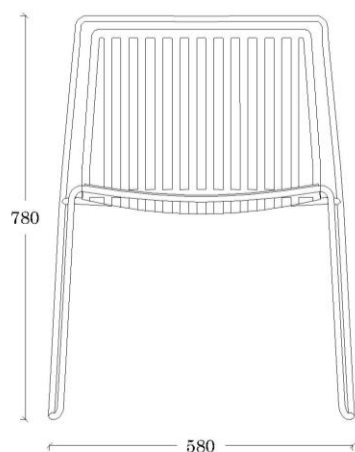

DIMENSIONS

58 cm x 52 cm x 78 cm x 45 cm
(22.8" x 20.5" x 30.7" x 17.7")
[width x depth x height x seat
height]

WEIGHT

7,5 kg (16.5 lb)

PACKAGING

Two chairs per box.
Box dimensions:

71 cm x 66 cm x 99 cm
(28" x 26" x 39")

CERTIFICATION

Product tested under the European
standard EN 161399:2013, category
of general use L1.

Designed in accordance with the
Ecodesign standard UNE-EN ISO
14006: 2011 certified by AENOR.

ACCESORIES

Cushion
Trolley

OPTION

Outdoor

STACKABILITY


4 units

ORIGIN

100% Made in Europe

DESIGN

Gabriel Teixidó

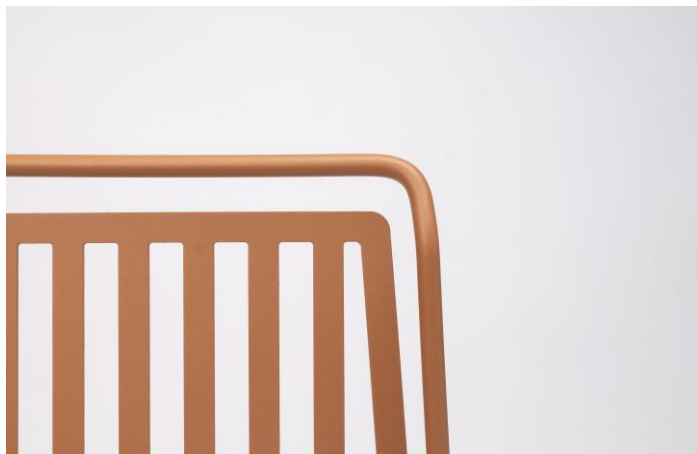

COMPONENTS

FRAME

Material

12 mm (0.5") diameter cold laminated E-220 quality (EN-10305 Normative) steel rod.

Tensile Strength > 310 N/mm² (44,960 psi);

Elastic Limit > 220 N/mm² (31,900 psi); Elongation > 23%

Finish

Epoxy Colour

SEAT

Material

3 mm (0.12") thickness cold laminated St-37 quality steel tube.

Tensile Strength: 340-470 N/mm² (49,300-68,160 psi)

Elastic Limit > 235 N/mm² (32,080 psi); Elongation > 25%

Surface Hardness > 110 HB

Finish

Epoxy Colour

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties and noxious compounds free. Additional shot blasting and zinc plating process for outdoor maximum resistance. Electrostatic application and oven cured at 200°C (392°F).

Technical Characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)

ACCESORIES CUSHION

Technical Characteristics:

Foam: 40kg/m³ (UNI EN ISO 845/ DIN53420).

Inner cover fabric composition: 50% Cotton; 50% Polyester.

Cushion fabric composition: 100% Acrylic; Weight: 335gr/m²;

Oil resistance: min.5; Color fastness to artificial weathering: 7-8 blue scale (8); Color fastness to light: 7-8 blue scale (8).

COM REQUIREMENT

Full fabric: 45 cm (17,7")